



DÜNNER, ELASTOMERER, NICHT VERLUSTARMER MIKROWELLENABSORBER

Eccosorb BSR-U ist ein dünner, flexibler, elektrisch nicht leitfähiger, nicht verlustarmer Urethane Absorber. Er wurde für den Frequenzbereich 6 GHz bis Millimeterwelle entwickelt.

EIGENSCHAFTEN UND VORTEILE

- Hohe thermische Stabilität
- Elektrisch nicht leitfähig
- Hoher magnetischer Verlust

MÄRKTE

- Kommerzielle Telekommunikationsanwendungen
- Sicherheit und Verteidigung
- Automotive und industrielle Elektronik

SPECIFICATIONS

TYPICAL PROPERTIES	ECCOSORB BSR
Frequency Range (GHz)	≥ 6 GHz
Max Service Temperature °C (°F)	170 (338)
Fire Retardancy	UL94 V-0
Hardness (Shore A)	> 70
Elongation (%)	50
Tensile Strength (MPa)	5.0
Volume Resistivity (ohm-cm)	2×10^8
Thermal Expansion per °C (°F)	63×10^{-6} (35×10^{-6})
Dielectric Strength (volts/mil)	>10
Outgassing (%TML) (%CVCM)*	0.47/0.28

Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

* Outgassing data per ASTM E595-07; criteria for acceptability is 1.00% TML and 0.10% CVCM.

APPLICATIONS

- Eccosorb BSR is engineered to reduce or eliminate surface currents, cavity resonance, coupling, and generally dampen reflections. It will significantly improve the operation of microwave devices by lowering the Q of cavities.
- Eccosorb BSR is recommended for use in high reliability aerospace, military, and space applications, exhibiting excellent thermal cycling, shock and vibration absorption characteristics.
- Some other applications include power amplifiers, oscillators and down/up converters.


AVAILABILITY

- Standard sheets are 305 x 305mm (12"x12").
- Standard thicknesses are 0.25mm (0.010"), 0.50mm (0.020"), 1.0mm (0.040"), 1.5mm (0.060") and 2.54mm (0.100").
- For most applications Eccosorb BSR can be supplied with a Pressure Sensitive Adhesive.
- Eccosorb BSR is available in other sizes, thicknesses and customer specified configurations upon request. This includes die cut and kiss cut parts to reduce installation labor by allowing quick assembly.

INSTRUCTIONS FOR USE

- Eccosorb BSR is designed to function directly in front of a metallic surface.
- For applications where the service temperature exceeds 121°C (250°F), the material can be bonded to most substrates by using an RTV silicone based adhesive in conjunction with a suitable primer.
- Eccosorb BSR can be readily cut with a sharp knife and template. It is a very flexible material and conforms to contoured surfaces.

Typical Attenuation Eccosorb BSR

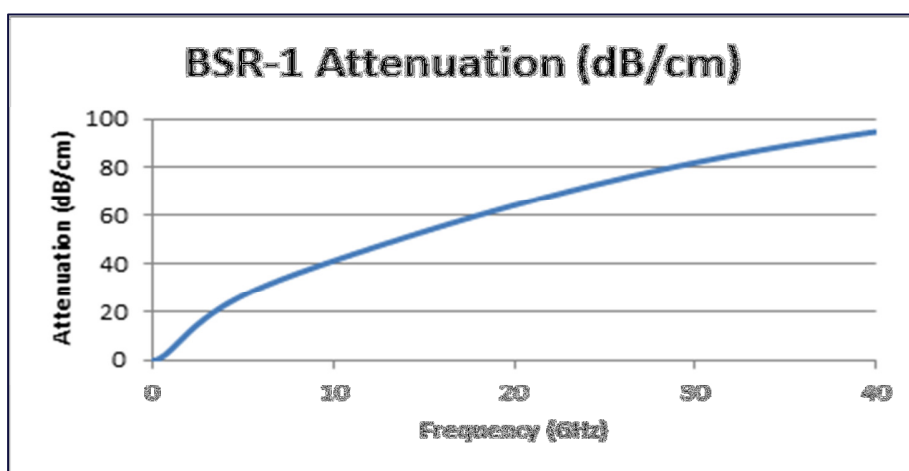

RFP-DS-BSR 093015

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.